




Infinite Track Profile 2321 8W IP40 LG

PRODUCT HIGHLIGHTS

- ~ LED low glare fixture for 48V track system
- ~ Colour temperature: 3'000K. Available upon request: 2'700K, and 4'000K
- ~ Fixed output LED driver is included with plug & play connection. Dimmable (DALI or 1-10V) driver available upon request
- ~ High-quality aluminium LED linear track light providing symmetric light with maximum luminaire efficiency and optimum photometric properties
- ~ Excellent Colour Consistency and high CRI (CRI > 95)
- ~ Available in white or black

GENERAL CHARACTERISTICS

Product Name	Infinite Track Profile 2321
LED Type	SMD
Materials	Body Aluminium finish
Dimensions (L x w x h)	171 x 22.8 x 21 mm
Ingress Protection	IP40

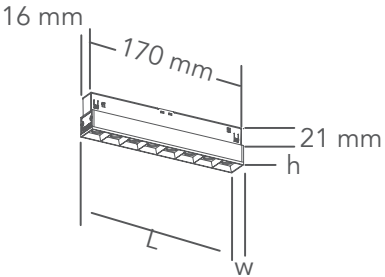

ELECTRICAL & LIGHT CHARACTERISTICS

Product Reference	ITLG2321SP930□	ITLG2321FL930□	ITLG2321WF930□	ITLG2321X48930□
Rated Power	8 W	8 W	8 W	8 W
Forward Current	350 mA	350 mA	350 mA	350 mA
Forward Voltage	24 V	24 V	24 V	24 V
Luminous Flux	857 lm	857 lm	857 lm	857 lm
Luminous Efficiency	107 m/W	107 m/W	107 m/W	107 m/W
Luminous Intensity	4'864 cd	1'542 cd	908 cd	2'186 cd
Beam Angle	15°	35°	50°	20° x 40°
Colour Name	Warm White	Warm White	Warm White	Warm White
Colour Temperature (CCT)	3'000 K	3'000 K	3'000 K	3'000 K
CRI	> 95	> 95	> 95	> 95

DISTANCE (m)	CONE DIAMETER (m)	ILLUMINANCE (lx)	DISTANCE (m)	CONE DIAMETER (m)	ILLUMINANCE (lx)	DISTANCE (m)	CONE DIAMETER (m)	ILLUMINANCE (lx)	DISTANCE (m)	CONE DIAMETER (m)	ILLUMINANCE (lx)
1.0	0.29	4'864	1.0	0.64	1'542	1.0	0.63	908	1.0	0.36	2'186
2.0	0.58	1'216	2.0	1.28	385	2.0	1.27	227	2.0	1.73	547
3.0	0.87	541	3.0	1.92	171	3.0	1.91	101	3.0	1.10	243
4.0	1.16	304	4.0	2.56	96	4.0	2.55	57	4.0	1.47	137
5.0	1.45	195	5.0	3.20	62	5.0	3.19	36	5.0	1.84	87

When ordering, please complete the product reference:

□ : Main Frame: W= White / B= Black / 0= Customized RAL