


**Infinite Track Profile 2324 IP40 Opal**

## PRODUCT HIGHLIGHTS

- ~ LED linear profile for 48V track system
- ~ Colour temperature: 3'000K. Available upon request: 2'700K, and 4'000K
- ~ Fixed output LED driver is included with plug & play connection. Dimmable (DALI or 1-10V) driver available upon request
- ~ High-quality aluminium LED linear track light providing symmetric light with maximum luminaire efficiency and optimum photometric properties
- ~ Excellent Colour Consistency and high CRI (CRI > 95)
- ~ Frosted PMMA diffuser for LED linear solution without visible dots
- ~ Available in white or black

## GENERAL CHARACTERISTICS

Product Name	Infinite Track Profile 2324
Materials	Body Aluminium Diffuser PMMA
Dimensions (l x h)	22.8 x 24 mm
Ingress Protection	IP40

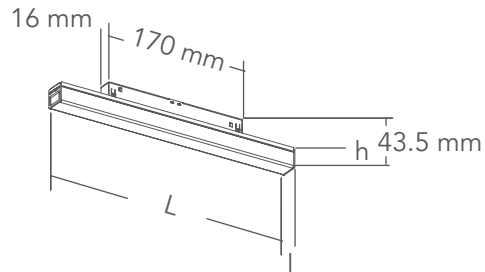

## ELECTRICAL & LIGHT CHARACTERISTICS

Product Reference	ITPR232406830	ITPR232412830
Rated Power	12 W	24 W
Forward Current	350 mA	350 mA
Forward Voltage	34 V	68 V
Luminous Flux	1'680 lm	3'300 lm
Luminous Efficiency	140 lm/W	140 lm/W
Beam Angle	120°	120°
Colour Name	Warm White	Warm White
Colour Temperature (CCT)	3'000 K	3'000 K
CRI	> 80	> 80
Dimensions (L)	600 mm	1200 mm