



**Architectural Serie
Wallwasher
ASW2005
21W 700mA GW IP20**




PRODUCT HIGHLIGHTS

- ~ LED Wallwasher from the Architectural Serie with consistent colour temperature
- ~ Operates with 700 mA constant current LED driver (driver not included)
- ~ Excellent Colour Rendering (CRI > 92)
- ~ Recommended for public areas such as receptions, lobbies, corridors...
- ~ Simple recessed installation suitable for wall thickness (from 1 mm to 35 mm)
- ~ Uniform light distribution
- ~ Long service lifetime of 25'000 hours
- ~ 3'000 K and 4'000 K versions available upon request
- ~ No UV or IR emissions. No mercury
- ~ Available in white or black

GENERAL CHARACTERISTICS

Product Name	Architectural Serie Wallwasher ASW2005 21W 700mA GW IP20
Energy Efficiency Label	A
Materials	Body Aluminium
LED Type	SMD
LED Quantity	5
Average Lifetime	25'000 hours
Start Time from 0% to 100%	0 sec
Mercury Content	0.0 mg
Ingress Protection	IP20
Dimensions (l x w x h)	206 x 54 x 47 mm
Cut-Out	201 x 49 mm

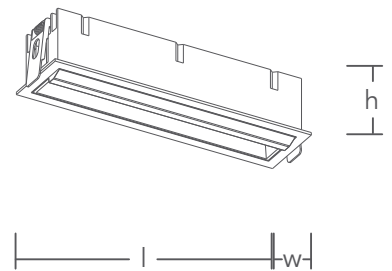

ELECTRICAL CHARACTERISTICS

System Power	21W
Forward Voltage	30V DC
Forward Current	700 mA

LIGHT CHARACTERISTICS

Product Reference	ASW2005SP927
Luminous Flux	1'785 lm
Luminous Efficiency	85 lm/W
Beam Angle	15° x 50° x 35° x 75°
Colour Name	Gold White
Colour Temperature (CCT)	2'700 K
CRI	> 92