



CREO Light.
Light years ahead.



**Cylindrical Surface Mounted Downlight
DCSM0910 15W IP54**




PRODUCT HIGHLIGHTS

- ~ Cylindrical Surface Mounted LED downlight
- ~ Simple surface mounting installation
- ~ Built-in fixed output LED driver included
- ~ Dimmable LED driver available upon request
- ~ Symmetric light distribution with optimum photometric properties
- ~ High colour consistency and excellent CRI (CRI > 80)
- ~ Available in black or white
- ~ Long service lifetime of 40'000 hours

GENERAL CHARACTERISTICS

Product Name	LED Cylindrical Surface Mounted Downlight DCSM0910 15W IP54
Energy Efficiency Label	A+
Materials	Body Aluminium
LED Type	COB
Service Lifetime	40'000 hours
Power Factor	> 0.9
Ingress Protection	IP54
Temperature Range	-20° ... +50°C
Operating Frequency	50-60 Hz
Input Voltage	100-240V AC

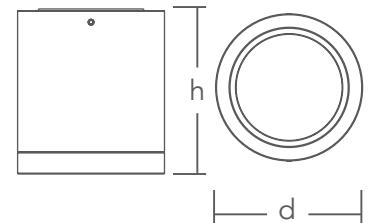

ELECTRICAL & PHOTOMETRIC CHARACTERISTICS

Product Reference	RATED POWER	BEAM ANGLE	LUMINOUS FLUX (lm)	LUMINOUS EFFICIENCY (lm/W)	CCT	CRI	DIAMETER (d) (mm)	HEIGHT (h) (mm)	WEIGHT (g)
DCSM0910VW827	15 W	60°	1'300	87	2'700K	> 80	Ø 90	100	520
DCSM0910VW830	15 W	60°	1'470	98	3'000K	> 80	Ø 90	100	520
DCSM0910VW840	15 W	60°	1'580	105	4'000K	> 80	Ø 90	100	520
DCSM0910VW850	15 W	60°	1'600	106	5'000K	> 80	Ø 90	100	520