



CREO Light.
Light years ahead.



PRO Slim Round Recessed Downlight DPSRR IP54




PRODUCT HIGHLIGHTS

- Extremely flat recessed LED downlight
- Simple spring mounting system, tool-free installation
- Remote fixed output LED driver included
- Dimmable LED driver available upon request
- Symmetric light distribution with optimum photometric properties
- Integrated slide switch 3 in 1. Possibility to choose between 3'000K, 4'000K or 6'500K
- High colour consistency
- Long service lifetime of 50'000 hours

GENERAL CHARACTERISTICS

Product Name	LED PRO Slim Round Recessed Downlight DPSRR IP54 / IP20
Energy Efficiency Label	A+
Materials	Housing Aluminium Diffuser Opal PC
LED Type	SMD
Service Lifetime	50'000 hours
Power Factor	0.9
Ingress Protection (Front / Back)	IP54 / IP20
Temperature Range	-20° ... +50°C
Operating Frequency	50-60 Hz
Input Voltage	220-240V AC

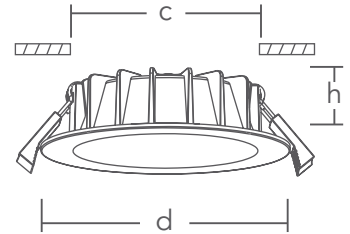

ELECTRICAL & PHOTOMETRIC CHARACTERISTICS

Product Reference	RATED POWER	BEAM ANGLE	LUMINOUS FLUX (lm)	LUMINOUS EFFICIENCY (lm/W)	CCT	CRI	DIAMETER (d) (mm)	HEIGHT (h) (mm)	CUT-OUT (c) (mm)	WEIGHT (g)
DPSRR10VWCCT	10 W	90°	865	87	3 in 1	> 80	Ø 110	30	Ø 90 - 95	250
DPSRR13VWCCT	13 W	90°	1'195	92	3 in 1	> 80	Ø 110	30	Ø 90 - 95	250
DPSRR18VWCCT	18 W	90°	1'730	96	3 in 1	> 80	Ø 145	30	Ø 120 - 130	350
DPSRR25VWCCT	25 W	90°	2'415	97	3 in 1	> 80	Ø 190	30	Ø 160 - 170	500
DPSRR35VWCCT	35 W	90°	3'400	97	3 in 1	> 80	Ø 225	34	Ø 200 - 210	650
DPSRR42VWCCT	42 W	90°	4'095	98	3 in 1	> 80	Ø 225	34	Ø 200 - 210	650