



CREO Light.
Light years ahead.



Square Recessed Slim Downlight IP20




PRODUCT HIGHLIGHTS

- Extremely flat recessed LED downlight with narrow trim
- Simple spring mounting system, tool-free installation
- Built-in fixed output LED driver
- DALI dimmable LED driver independent remote mounting (optional)
- Symmetric light distribution with optimum photometric properties
- High colour consistency and excellent CRI (CRI > 80)
- Long service lifetime of 30'000 hours for luminous flux at 90% of initial value (L90)

GENERAL CHARACTERISTICS

Product Name	LED Square Recessed Slim Downlight
Energy Efficiency Label	A+
Materials	Trim Die-cast aluminium
	Housing Die-cast aluminium
	Cover Opal PC
Service Lifetime	30'000 hours
Power Factor	0.6
Ingress Protection	IP20

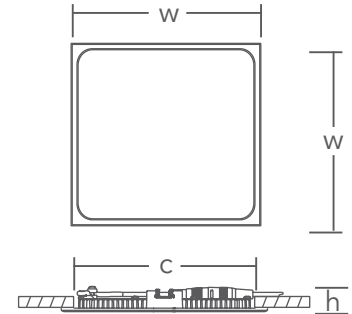

ELECTRICAL & PHOTOMETRIC CHARACTERISTICS

Product Reference	RATED POWER	BEAM ANGLE	LUMINOUS FLUX (lm)	LUMINOUS EFFICIENCY (lm/W)	CCT (K ± 200)	CRI	WIDTH (w) (mm)	HEIGHT (h) (mm)	CUT-OUT (c) (mm)	WEIGHT (g)
SLQ3R830	8 W	120°	680	85	3'000K	> 80	90	25	70	139
SLQ3R840	8 W	120°	680	85	4'000K	> 80	90	25	70	139
SLQ3R860	8 W	120°	680	85	6'000K	> 80	90	25	70	139
SLQ5R830	16 W	120°	1'380	86	3'000K	> 80	145	25	130	336
SLQ5R840	16 W	120°	1'380	86	4'000K	> 80	145	25	130	336
SLQ5R860	16 W	120°	1'380	86	6'000K	> 80	145	25	130	336
SLQ6R830	24 W	120°	1'900	80	3'000K	> 80	170	25	140	445
SLQ6R840	24 W	120°	1'900	80	4'000K	> 80	170	25	140	445
SLQ6R860	24 W	120°	1'900	80	6'000K	> 80	170	25	140	445
SLQ8R830	30 W	120°	2'600	87	3'000K	> 80	220	25	200	704
SLQ8R840	30 W	120°	2'600	87	4'000K	> 80	220	25	200	704
SLQ8R860	30 W	120°	2'600	87	6'000K	> 80	220	25	200	704