



CREO Light.
Light years ahead.



**Square 595 x 595
40 W Slim Panel G2
IP40**




PRODUCT HIGHLIGHTS

- Extremely flat recessed LED slim panel suitable for lay-in installation
- High color consistency and excellent CRI (CRI>80)
- Excellent thermal management
- Long service lifetime of 25'000 hours for luminous flux at 90% of initial value (L90)
- Low glare, light guide plate for uniform and smooth light output beam
- DALI/DSI or 1-10V dimmable LED driver (optional)
- Available accessories: clip-in frame, spring recessing kits, and surface mounted box
- Remote driver included

GENERAL CHARACTERISTICS

Product Name	LED Square 595 x 595 Slim Panel G2
Energy Efficiency Label	A+
Materials	Trim Extruded aluminium
	Housing Aluminium sheet
	Cover Opal color PS
Service Lifetime	25'000 hours
Ingress Protection	IP40

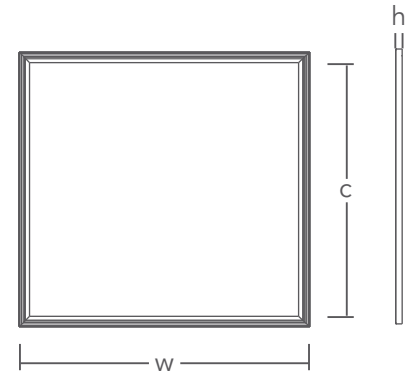

ELECTRICAL & PHOTOMETRIC CHARACTERISTICS

Product Reference	RATED POWER	FORWARD CURRENT	BEAM ANGLE	LUMINOUS FLUX (lm)	LUMINOUS EFFICIENCY (lm/W)	CCT (K ± 200)	CRI	WIDTH (w) (mm)	HEIGHT (h) (mm)	CUT-OUT (c) (mm)	WEIGHT (g)
PLQ40WW5959G2	40 W	700 mA	110°	3'400	85	3'000K	>80	595	13	580	230
PLQ40NW5959G2	40 W	700 mA	110°	3'400	85	4'000K	>80	595	13	580	230
PLQ40DL5959G2	40 W	700 mA	110°	3'400	85	6'500K	>80	595	13	580	230