




CREO Light.  
Light years ahead.



**Square Low Glare Panel  
595 x 595 36W IP20**

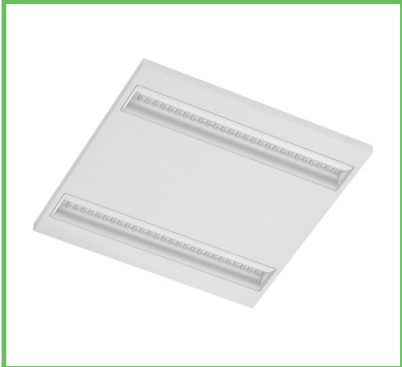


## PRODUCT HIGHLIGHTS

- LED 595 x 595 low glare panel easy & quick installation suitable for lay-in installation
- Built-out driver included providing advanced functionality
- Excellent thermal management
- DALI or 0-10V or TRIAC dimmable LED driver (optional)
- High luminous efficacy and homogenous light distribution
- Long service lifetime of 50'000 hours
- High system efficiency up to 112 lm/W and total luminous flux up to 3'920 lm
- Energy savings up to 50% compared to conventional luminaires

## GENERAL CHARACTERISTICS

Product Name	Square Low Glare Panel 595 x 595 36W IP20
Energy Efficiency Label	A+
Materials	Housing PC+ABS Optics PC
Temperature Range	-10° ...+50°C
Service Lifetime	50'000 hours
Power Factor	> 0.9
UGR	< 19
Ingress Protection	IP20
Operating Frequency	50-60 Hz
Input Voltage	220-240V AC

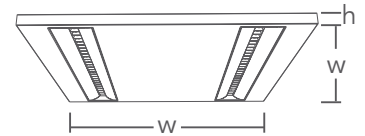

## ELECTRICAL & LIGHT CHARACTERISTICS

Product Reference	RATED POWER	BEAM ANGLE	LUMINOUS FLUX (lm)	LUMINOUS EFFICIENCY (lm/W)	CCT (K ± 200)	CRI	WIDTH (w) (mm)	HEIGHT (h) (mm)	CUT-OUT (c)(mm)	WEIGHT (g)
PLLGQ36WW5959G3	36W	80°	3'923	112	3'000K	> 80	595	23.5	555 x 555	3'500
PLLGQ36NW5959G3	36W	80°	3'923	112	4'000K	> 80	595	23.5	555 x 555	3'500
PLLGQ36DL5959G3	36W	80°	3'923	112	5'700K	> 80	595	23.5	555 x 555	3'500